

## 1. Technical Specifications :

Particular	Remarks	
Key Matrix For Flashing	NA	
Chipset	MT6589	
Android Version	Android 4.4	
Frequency	GSM : 900/1800/1900MHz UMTS : 900/2100MHz	
Network Mode	Dual SIM: WCDMA+GSM	
ROM	4 GB	
RAM	1 GB	
Internal SD Card memory	1.4GB for user	
Expandable Memory	32GB	
Factory mode code	*#9527*#	




### 2. CAUTIONS

- I. Flashing & Servicing must be undertaken by qualified personnel only.
- II. Ensure all work is carried out at an anti-static workstation and that an anti-static wrist strap is worn.
- III. Use only approved Tools & components as specified in the parts list.
- IV. Ensure all components, modules, screws, and insulators are correctly re-fitted after servicing and alignment
- V. Ensure all cables and wires are repositioned correctly if Handset disassembled
- VI. Electrostatic discharge can easily damage the sensitive components of electronic products. Therefore, Service Centre must adhere the precautions which mentioned above.

#### 3. Installation of Upgrade Driver


- 1. Get the upgrade driver files;
- 2. Power the phone off and connect it to the PC via the data cable of standard configuration; the driver is not installed if it is the first time of upgrade; please install the driver manually, and specify the installation path to the position where the driver is located;
- 3. After the upgrade driver is successfully installed, the device driver port can be seen in Device Manager:

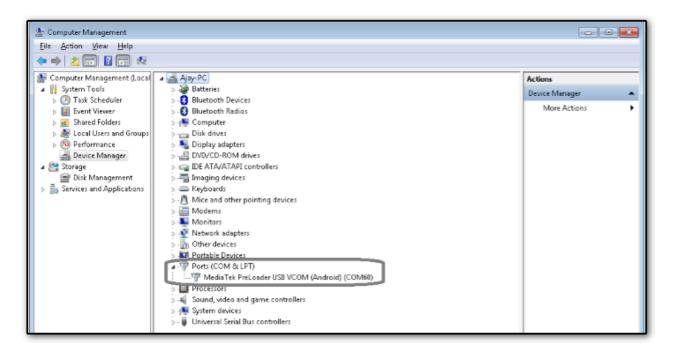



#### 4. Configuration of Upgrade Platform

#### Flash tool setup must install first

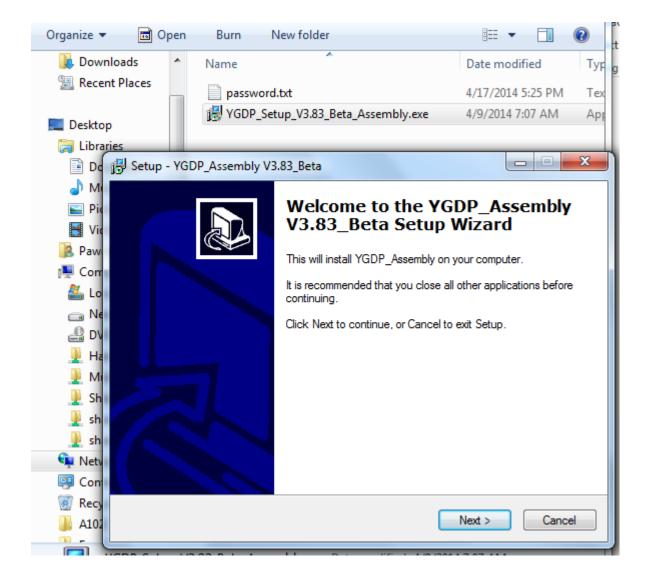


Click on Next > Next > Next to finish installation



Flash tool shortcut will available on Desktop



> Once click on above icon , Below error will appear

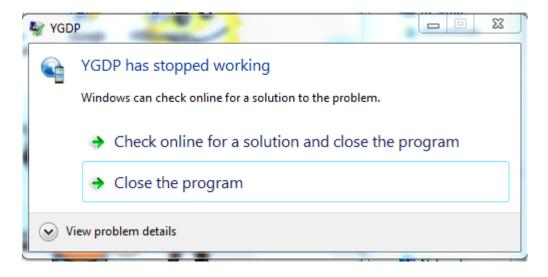


Right click on icon and go to properties


0	es	×
Security General	Details Shortcut	Previous Versions Compatibility
fi YG	DP	
Target type: Target location:	Application YGDP	
Target:	C:\YLXZGJ\YGDP\YGD	P_Assembly.exe
Start in:	C:\YLXZGJ\YGDP	
Shortcut key:	None	
Run:	Normal window	•
Comment:		
Open File Lo	cation Change Icor	n Advanced
	ОК	Cancel Apply



Go to compatibility > Enable below shown "Run this program in compatibility mode for :"

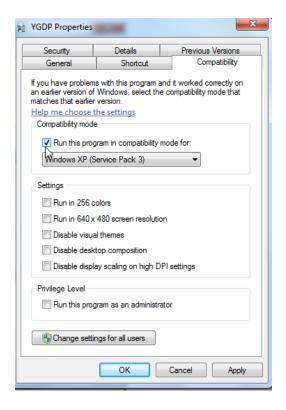

Select system OS , Ex: window 7 > click on Apply > OK





> Now double click on Flash tool icon, below screen will appear, Enter Password: 369

VGDP	×	
Connect to YGDP_D	)ownload_Platform:	_
User: Password:	Assembly -	
	Language/English	
	Login Cancel	]

> Open the upgrade platform (password: 9527) to finish the following configuration

	lick on Co	nfig load Configuration	
Confi	g 🔍 Kart	Set Download Files Set Download setting	
		Config file y The Select the upgrade v	orgion
	📃 E:\04.Androi		CISIOII
Cel Cell	l Donwload Progr		ון
150	Progre	Please select PreResource file:	
Cell 0	0.00%		
Cell 1	0.00%	Verify Download Files Log	
Cell 2	0.00%	72955	a 14
Cell 3	0.00%	2 Select	
Cell 4	0.00%	72965_101	
Cell 5	0.00%	73201	4050:
Cell 6	0.00%	7560T	
🎱 Cell 7	0.00%		
		Apply Cancel	
Baye 1	🔁 Clear	4 Click [Apply]to verify the	e version



> Below screen will appear, wait till tool verify the files

Downlo	ad Configuration			23
🧰 Set	Download Files	💊 Dow	nload setting	
	72961	•	Config file version: V2.62_20140404_08	
III — Č	7296S		Please select CPB file:	
>	72965_101		D:\ODM Documents\New\Yulong\A109\HW_V1\Software\	
	) 🔲 7298A		Please select PreResource file:	
	) 📃 7298D			
	7298L	_		
	7320	E	Verify Download Files Log	
	73201		U Start to verify CPB file	
	7321		Checking UPB file Get CPB version	
	7560Т		Unzip files	
	7560U			
	7576U			
	7610			
	7620L			
	7625	Ŧ		
			V AP	Cancel

Connection of Mobile Phone before Upgrade

💽 YGDP		
<u>F</u> ile <u>V</u> iew <u>H</u>	elp	
8 5	First o	click "Start"; then connect the phone; the
Last Used: 🖠	E:\04.Android	
Cell	Donwload Progres Phone	is powered off with battery installed.
Cell	Progress	
Cell 0	0.00%	Cell 0 Cell 1 Cell 2 Cell 3 Cell 4
🍏 Cell 1	0.00%	Common Settings Settings
🍥 Cell 2	0.00%	Software Version: Customer - <v3.83beta 1<="" th=""></v3.83beta>
🍥 Cell 3	0.00%	
🍥 Cell 4	0.00%	Ser: Customer
🍥 Cell 5	0.00%	Download Device: 7296S_I01 CPB File Path: E:\04.Android平台\7296SI_01\4.2.006.P0.14050.
Cell 6	0.00%	Sesource File Path: YGDP Software Version: V3.83Beta_140429_10
🎱 Cell 7	0.00%	Config File Version: V2.62_20140504_13

Upgrade Successful

🕤 YGDP					
<u>F</u> ile <u>V</u> iew <u>H</u> el	P				
📀 Config	Start 🗾 🔏 Sto	p Help			
sed	- · · · · · · · · · · · · · · · · · · ·	SI_01\4.2.006.P0.140502.72965_I01.CPB			
6 - T	Upgrade successful				
Cell	Progress				
Cell 0	100.00%	Cell 0 Cell 1 Cell 2 Cell 3 Cell 4			
Cell 1	0.00%	Common Settings Settings			
Cell 2	0.00%	Software Version: Customer - <v3.83beta_1< td=""></v3.83beta_1<>			
Cell 3	0.00%	Item Value			
Cell 4	0.00%	User: Customer Download Device: 7296S I01			
Cell 5	0.00%	CPB File Path: E:\04.Android平台\7296SI_01\4.2.006.P0.14050			
Cell 6	0.00%	0.00% Persource File Path:			
Cell 7	0.00%	Config File Version: V2.62_20140504_13			
🛛 💾 Save 🛛 🤣	Clear				

After upgrade is finished, input \*#\*#9527#\*#\* to check the version.

# Thanks

For any Query or suggestion, Please write to <a href="mailto:tech.help@micromaxinfo.com">tech.help@micromaxinfo.com</a>

