

Guide for SW Upgrading

Contents

1. Equipment required
2. Notice
3. Installation
4. Upgrade SW

1. Equipment required


item	Description
① Computer	To install driver/ upgrade SW
② Update tool	OEM_Download Factory(1.0.0.6)_Setup.exe
③ Data cable	5pin Micro USB cable
④ OS supported	Windows 2000/XP/Vista/ Seven
⑤ Driver	QSC1105_USB_Driver

2.Notice



- **Do not** disconnect USB cable when updating the SW
- If you change to use other USB port or another PC, please check the COM port No. first before updating.
- If the handset dead when updating SW, please using Emergency download to rescue it


3. Installation

- Install QSC1105 driver (the folder “QSC1100_USB_Driver”) first when you first time connect the phone with PC
 1. ---Device Manager---find “other devices” or yellow mark

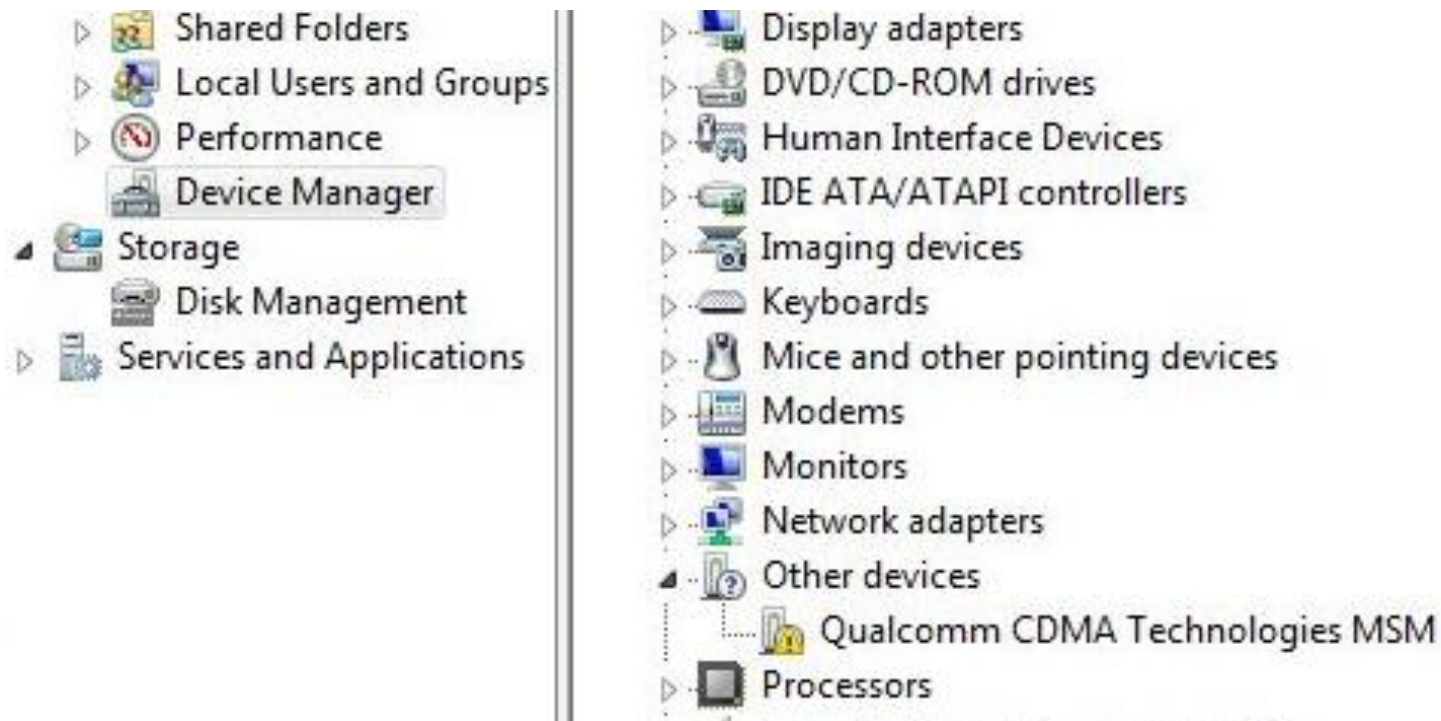

2. Install the driver as these step:

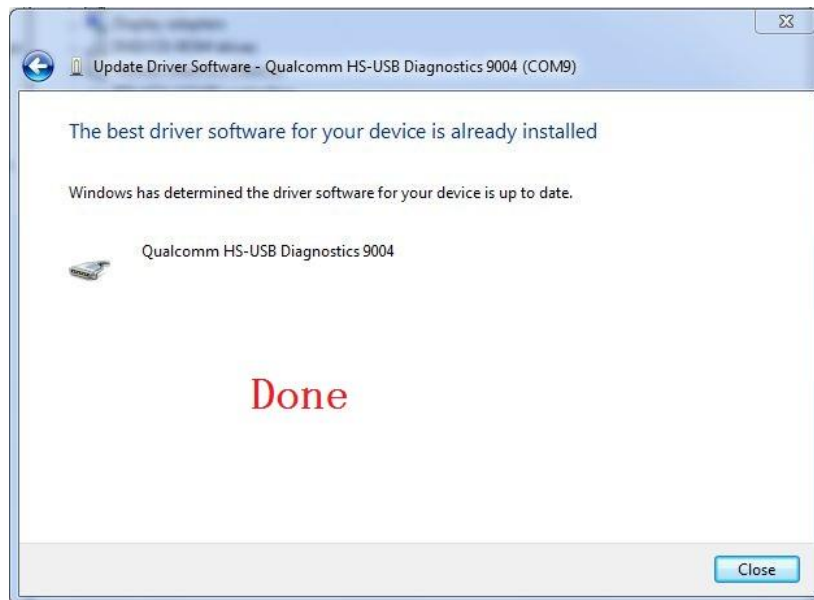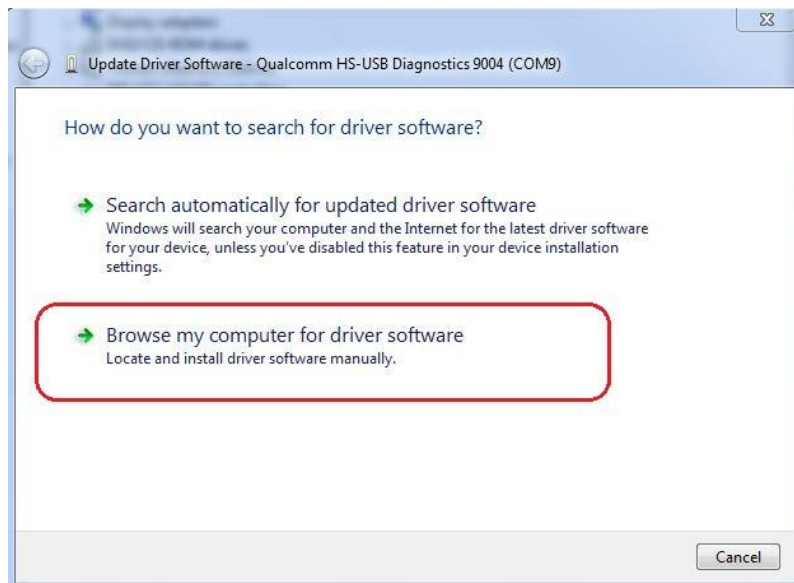


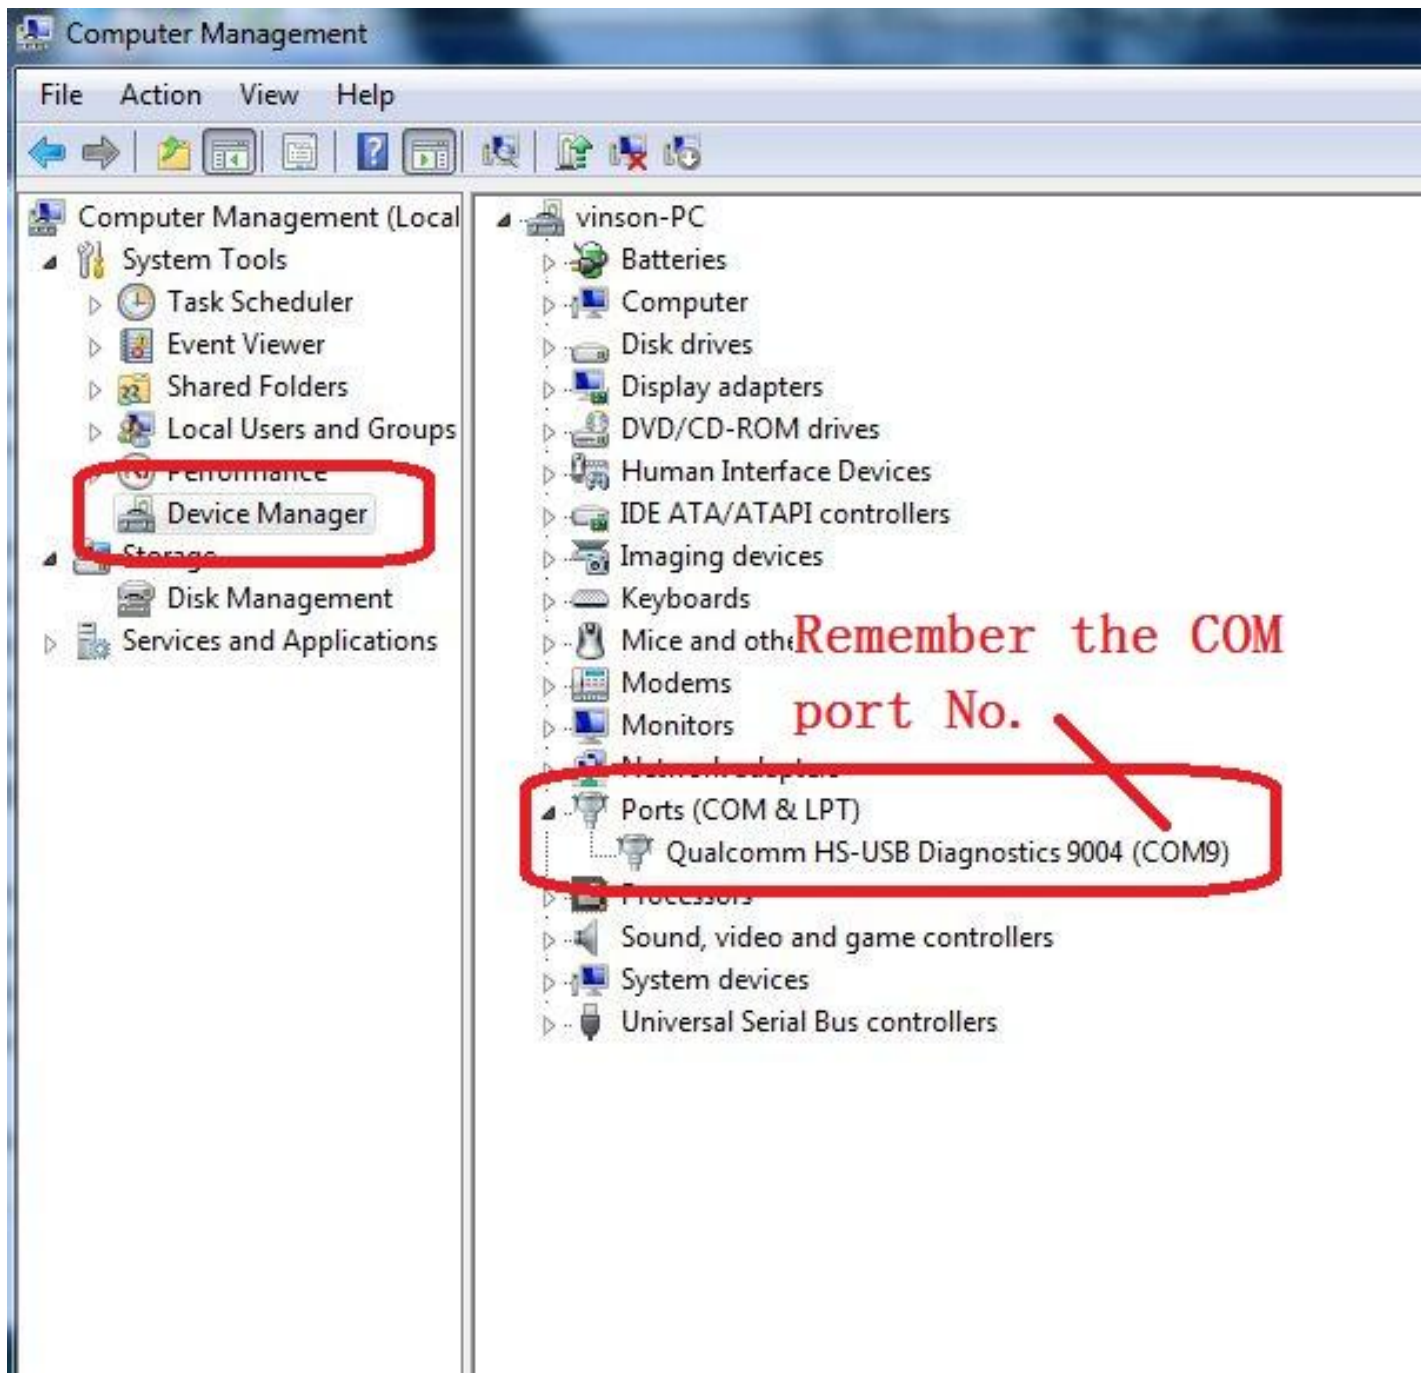

Remember the COM No. in Device manager


Remember the COM port No.

- Secondly , install the Download tool which named “OEM_Download Factory(1.0.0.6)_Setup” following the steps as below:

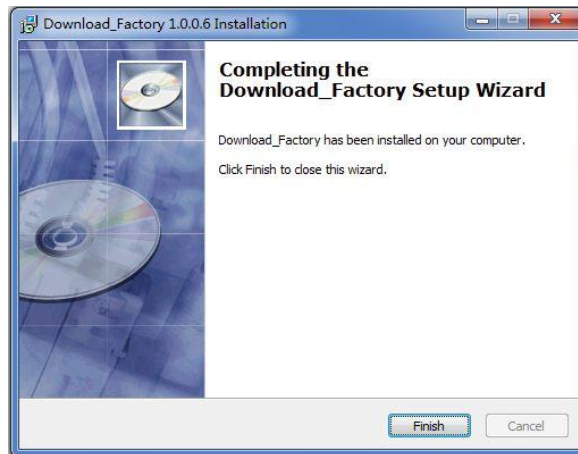


4. Upgrade SW

Double click the Icon
in the desktop

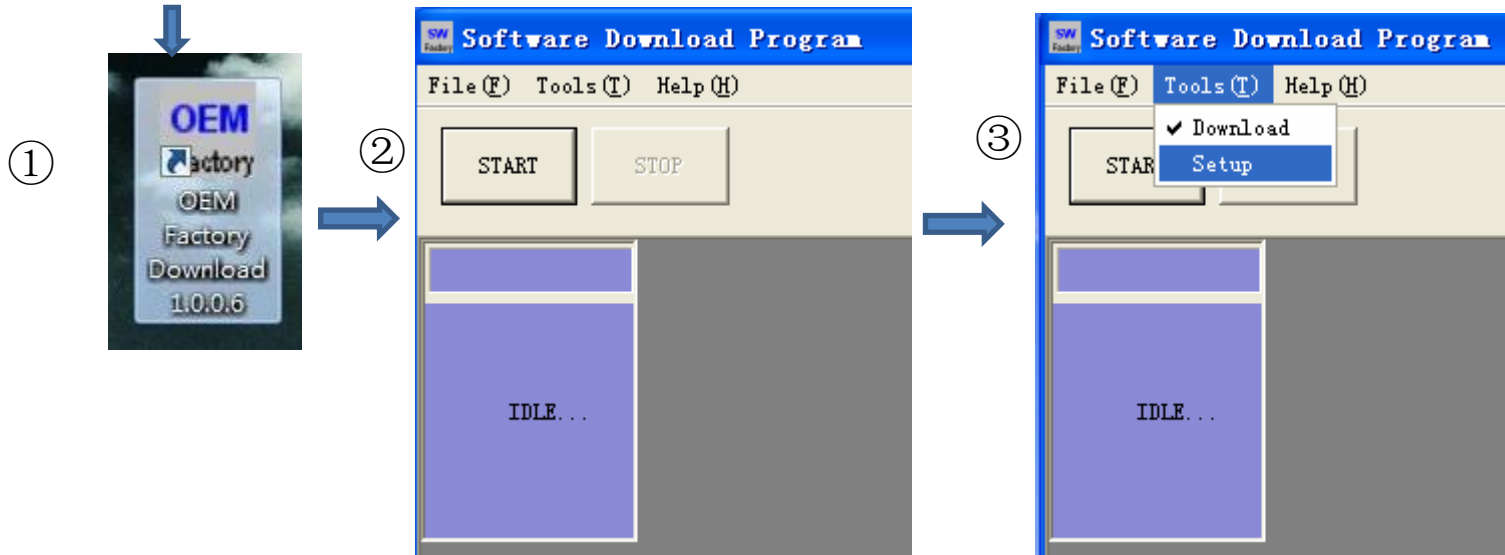

④

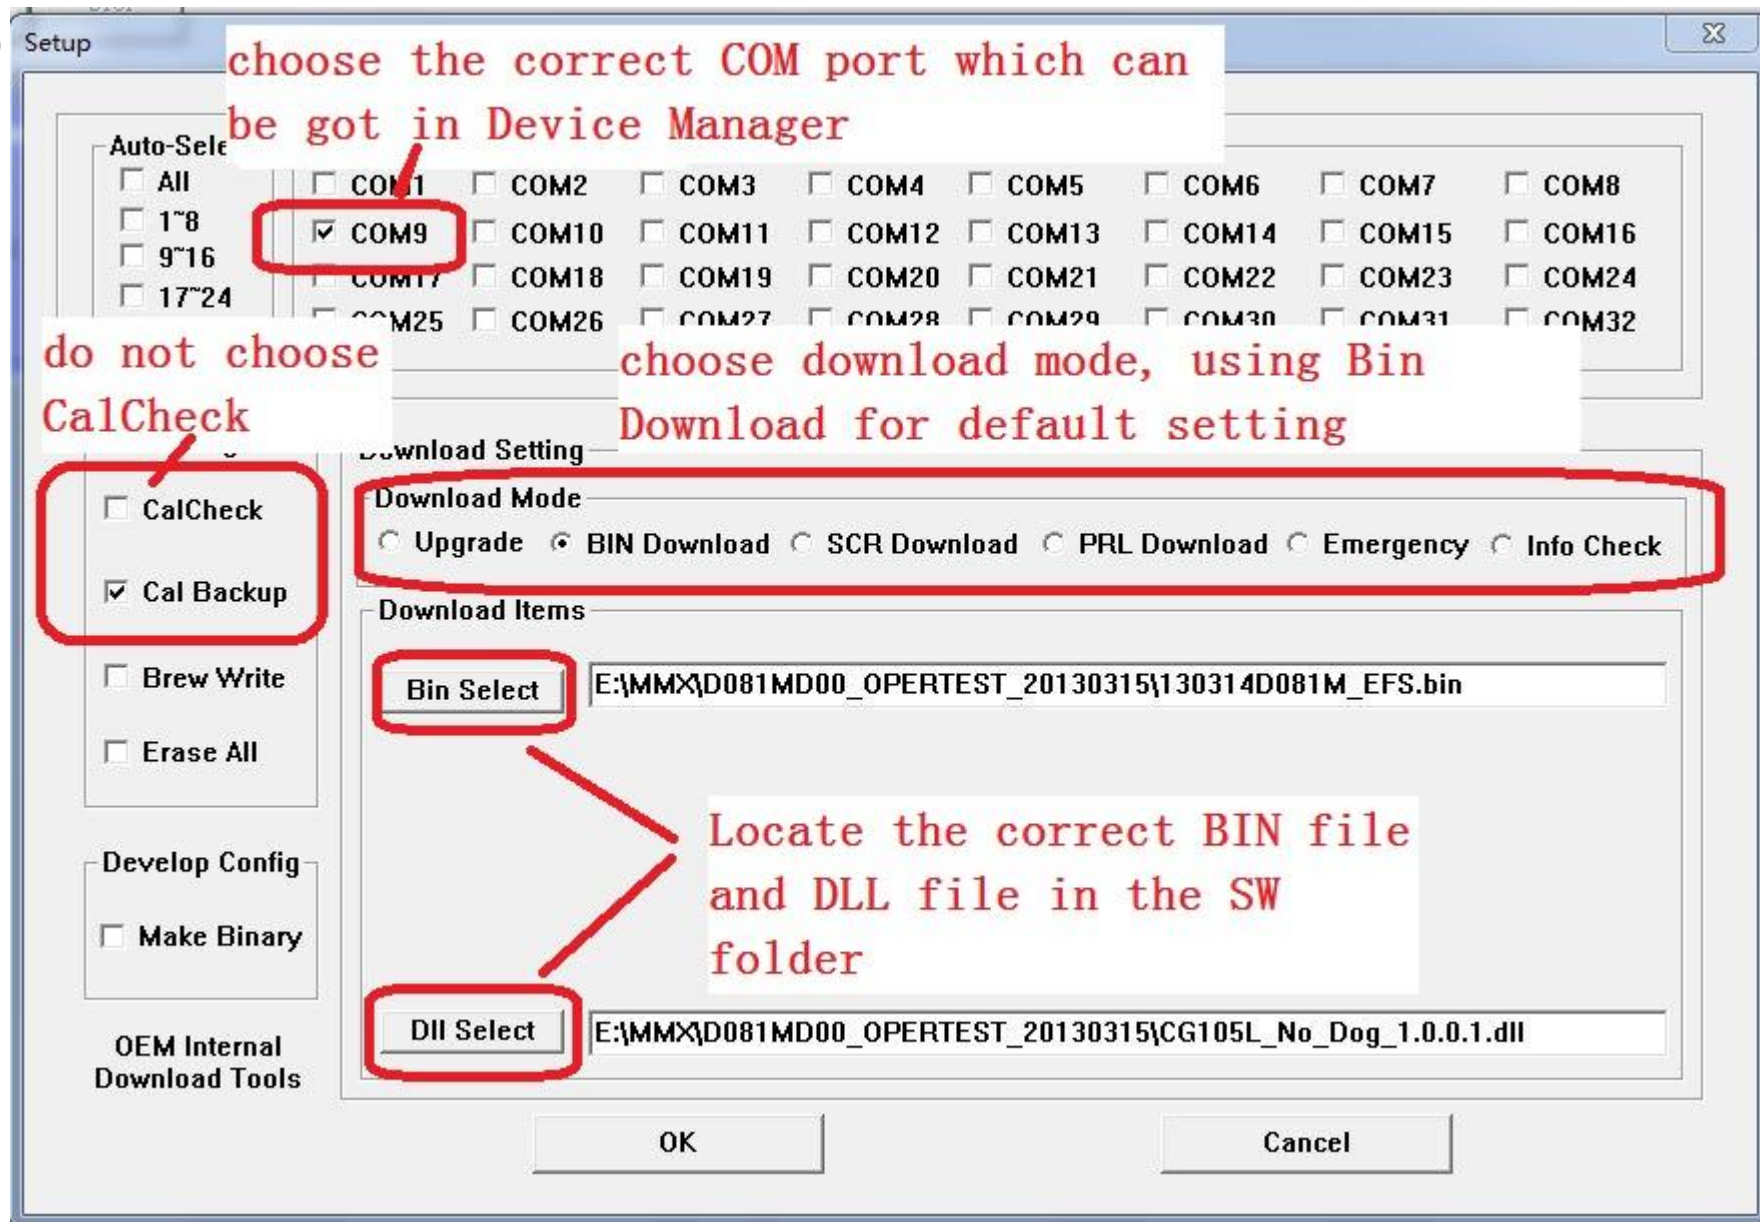

If need to use Upgrade Mode , please locate the correct BIN/SCR /DLL files

Setup

COM Port Select

Auto-Select

- All
- 1~8
- 9~16
- 17~24
- 25~32

Manual-Select

- COM1 COM2 COM3 COM4 COM5 COM6 COM7 COM8
- COM9 COM10 COM11 COM12 COM13 COM14 COM15 COM16
- COM17 COM18 COM19 COM20 COM21 COM22 COM23 COM24
- COM25 COM26 COM27 COM28 COM29 COM30 COM31 COM32

Config

- CalCheck
- Cal Backup
- Brew Write
- Erase All

Develop Config

- Make Binary

OEM Internal Download Tools

Download Setting

Download Mode

- Upgrade
- BIN Download
- SCR Download
- PRL Download
- Emergency
- Info Check

Download Items

Bin Select

SCR Select

PRL Select NULL

DII Select

OK


Cancel

If need to use Upgrade Mode , need to locate BIN/SCR/DLL files


⑤ Then press **Start** button to begin



The handset will reboot automatically in the procedure, **Do not disconnect** the Handset from PC , until it show **Success download**. It will take about 6 to 10 minutes

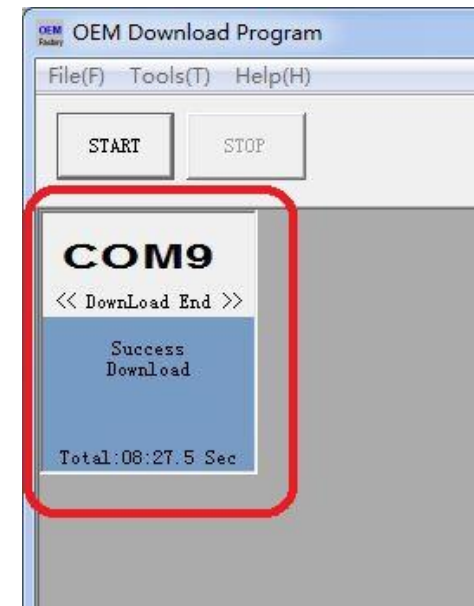


This tool support multiple download, it can be upgraded SW for 2 or more Handsets in the same time. It need to choose the correct COM port No. as like that:

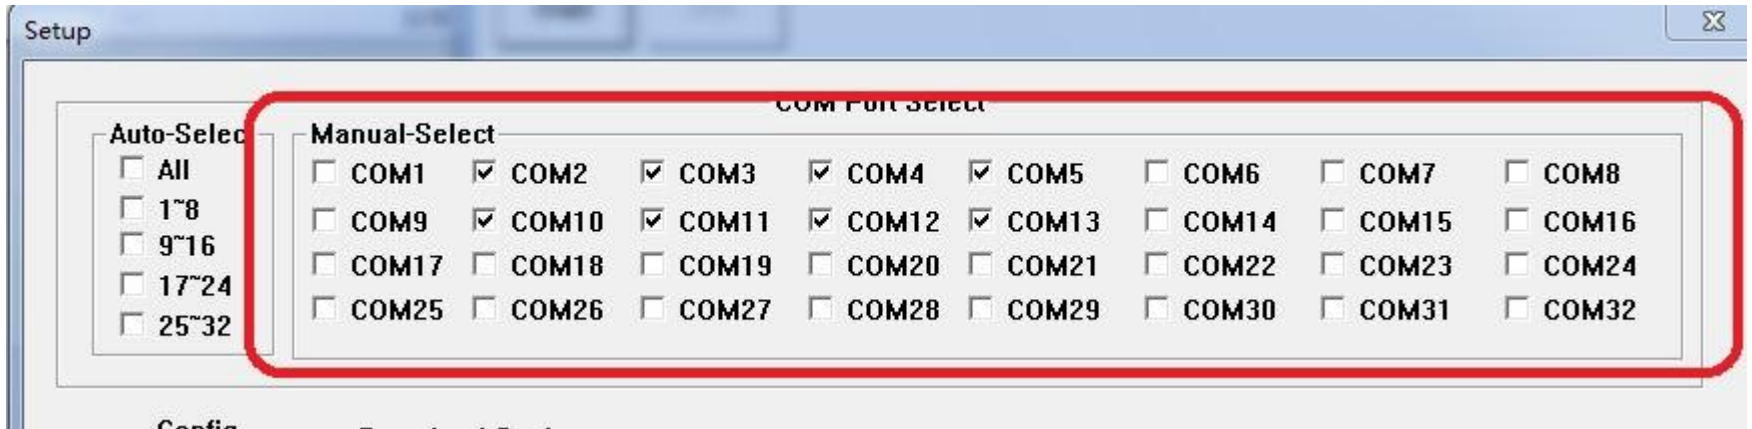

Emergency download

If the handset dead when updating SW, it need to use Emergency Download to fix it

Setting for Emergency mode

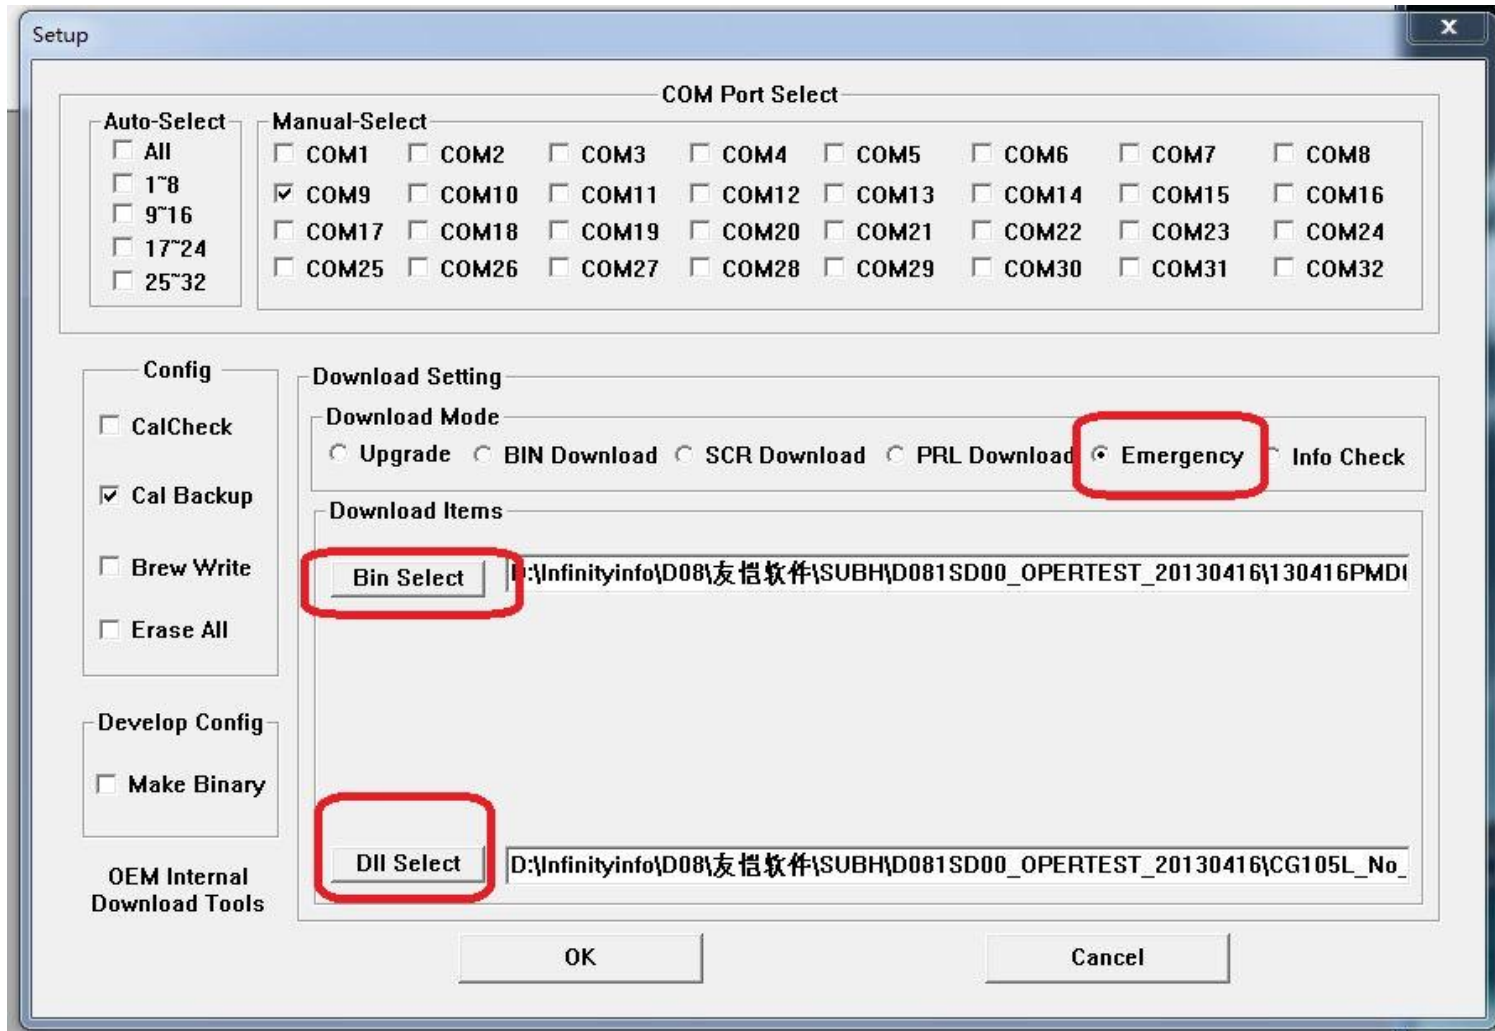

1. Disconnect USB cable first , and pull out the battery.
2. Press the key of “1” and holding it until step 4
3. Connect handset to PC using USB cable
4. Find the COM port No. in Device Manager, then unhold the key “1”
5. Set the configuration as the picture above, using the same BIN/DLL file
6. Press start button to begin

**After finish Emergency download, disconnect the handset, and plug into PC again
Using SRC mode to upgrade SRC file.**

CalCheck
 Cal Backup
 Brew Write
 Erase All

Develop Config
 Make Binary

OEM Internal Download Tools

Download Mode
 Upgrade BIN Download SCR Download PRL Download Emergency Info Check

Download Items

SCR Select

PRL Select NULL

Dll Select D:\Infinityinfo\D08\友指软件\SUBH\D081SD00_OPERTEST_20130416\CG105L_No_

Then it is the completed procedure for Emergency rescue